

90° Ultra wide flare

Modern City YOUNG IP65 downlight

IP65

Use of die-cast aluminum lamp combined with silicone sealing structure to prevent water infiltration in the lamp, up to IP65 protection level, lamps are widely used in wet environments, such as the underground garage, bathroom, balcony, or any humidity environment.



Cutout: Φ75 / Φ105 / Φ125 / Φ160


ULTRA-WIDE LIGHT

A large area of luminous surface brings a broad and uniform lighting effect, to ensure greater luminous Angle and luminous uniformity. The light is bright and soft, the brightness is even and excessive, and the visual effect is comfortable and natural. Applicable to fitness clubs, indoor swimming pools, office, home, shops and other public areas.



MC7475F IP65*	MC75105F IP65*	MC76125F IP65*	MC77160F IP65*
	σ σ φ ₁₁₂	68 0145	90 μ μ μ φ180 —
م ۵75	↔ ⊕105	م ۵۱25	(C) (D) (D) (D) (D) (D) (D) (D) (D
TECHNICAL DETAILS			
			_

YOUNG

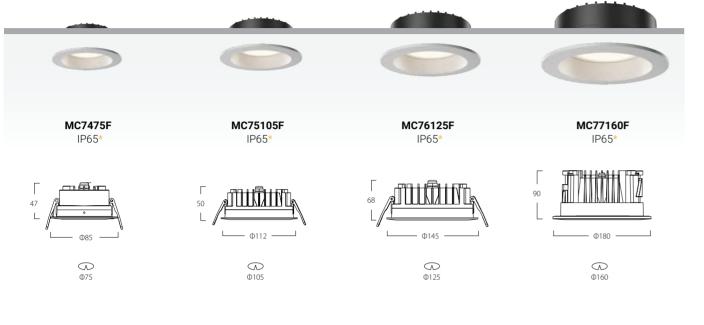

INFORMATION

MC7475F IP65

Power	Light Source	Beam angle	ССТ	Flux	CRI	Installation	Power supply
9W	LED SMD	90°	2700K	560lm	90+		36V,200mA
			3000K				
			3500K				
			4000K				

MC75105F IP65

Power	Light Source	Beam angle	ССТ	Flux	CRI	Installation	Power supply
15W	LED SMD	90°	2700K	950lm	90+		36V,350mA
			3000K				
			3500K				
			4000K				

MC76125F IP65

Power	Light Source	Beam angle	ССТ	Flux	CRI	Installation	Power supply
24W	LED SMD	90°	2700K	1665lm	90+		36V,550mA
			3000K				
			3500K				
			4000K				

UNIT: mm

MC77160F IP65

Power	Light Source	Beam angle
35W	LED SMD	90°

Material	
aluminium	
Optical system	

Electrical connection on/off

Control

opal diffusor

Light source LED SMD

*Matters needing attention

Light distributions







 $\overline{}$

gle	ССТ	Flux	CRI	Installation	Power supply
	2700K	2275lm	90+		36V,850mA
	3000K				
	3500K				
	4000K				

